ООО "АРМАШОП"
https//armashop.ua/
Для заявок: info@armashop.ua
Тел.: (044) 490-55-57
Украина, г. Киев. ул. Здолбуновская, 7Д

ARTICULO: 2406
Válvula de Retención tipo wafer de simple disco
Check Valve (single disk) wafer type

Características

1. Válvula de retención a disco tipo wafer.
2. Construcción en Acero Inox. 1.4408 (CF8M).
3. Juntas Externas de FKM (Viton).
4. Asiento de FKM (Viton).
5. Montaje entre bridas EN 1092 PN10/16 y ANSI150.
6. Instalación Horizontal ó Vertical (↑).
7. Presión de trabajo máxima 16 bar.
8. Temperatura de trabajo -20ºC +180ºC.
9. Bajas perdidas de carga.

Features

1. *Wafer check valve (single disk).*
2. *Made of Stainless Steel 1.4408 (CF8M).*
3. *External o'ring made of FKM (Viton).*
4. *Disk o'ring (seat) made of FKM (Viton).*
5. *Assembly between flanges EN 1092 PN10/16 & ANSI150.*
6. *Installed with vertical (↑) or horizontal flow.*
7. *Max. Working pressure 16 bar.*
8. *Working temperature -20ºC +180ºC.*
9. *Low head losses.*

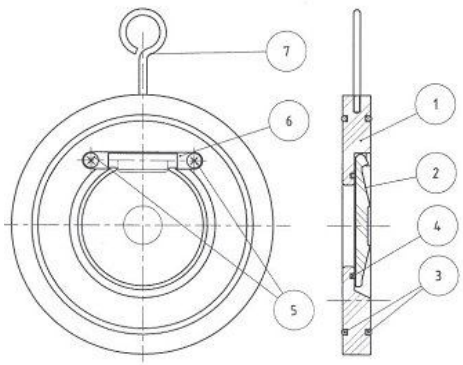

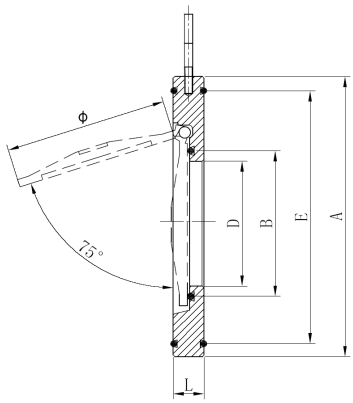

Nº	Denominación / *Name*	Material	Acabado Superficial / *Surface Treatment*	Cód. Recambio *Spare Part Code*
1	Cuerpo / *Body*	Acero Inox / *SS* 1.4408 (CF8M)	Granallado / *Shot blasting*	------
2	Disco / *Disk*	Acero Inox / *SS* 1.4408 (CF8M)	Granallado / *Shot blasting*	------
3*	Junta exterior / *External O'ring*	FKM	------	K2406
4*	Junta disco / *Disk O'ring*	FKM	------	K2406
5	Tornillo eje / *Axis screw*	Acero Inox AISI 316 / SS 316	------	------
6	Tope eje / *Stem Stopper*	Acero Inox AISI 316 / SS 316	------	------
7	Gancho / *Hook*	Acero / *Steel*	Cincado / *Zinc Plated*	------

* Piezas de recambio disponibles / *Available spare parts*

Edificio Genebre. Av. de Joan Carles I, 46-48
08908 L'Hospitalet de Llobregat. Barcelona (Spain)
genebre@genebre.es - www.genebre.es

DIMENSIONES GENERALES / *GENERAL DIMENSIONS*

Ref	Medida / Size	PN	Dimensiones / Dimensions (mm)						Peso / Weight (Kg)
			A	B	D	E	L	Ø	
2406 08	1 ½"	16	85	33	25	68	12	40	0.450
2406 09	2 "	16	105	41	32	84	14	47.5	0.790
2406 10	2 1/2 "	16	124	51	40	96	14	63	1.110
2406 11	3 "	16	136	65	54	118	14	74	1.340
2406 12	4 "	16	164	85	70	148	18	92	2.300
2406 13	5 "	16	194	106	92	166	18	116	3.100
2406 14	6 "	16	220	130	114	197	20	138	4.500
2406 16	8 "	16	275	170	154	249	22	179	7.150
2406 18	10 "	16	330	220	200	310	26	230	11.950
2406 20	12 "	16	384	255	230	358	30	270	20.500

CURVA PRESIÓN TEMPERATURA / *PRESSURE TEMPERATURE RATING*

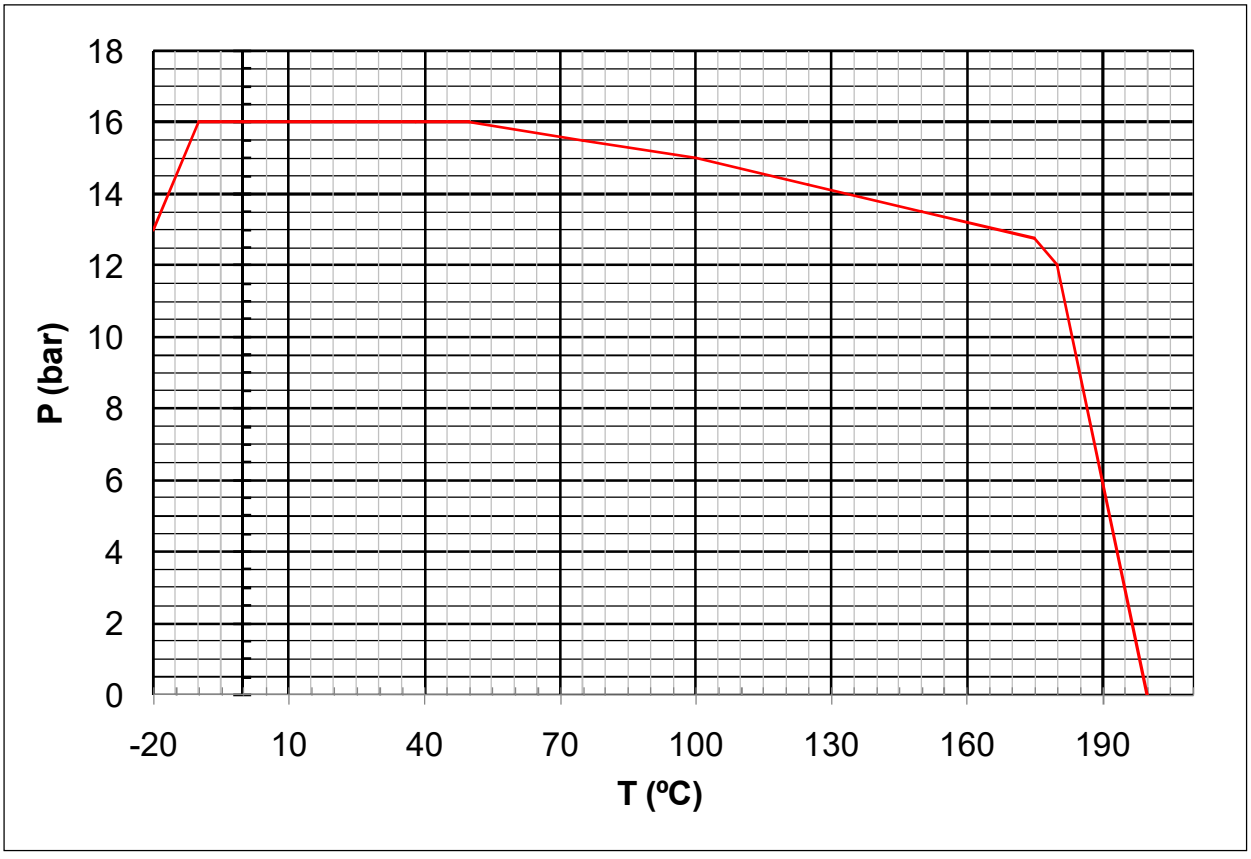

Edificio Genebre. Av. de Joan Carles I, 46-48
08908 L'Hospitalet de Llobregat. Barcelona (Spain)
genebre@genebre.es - www.genebre.es

VALORES DE Kv / ***Kv VALUES***

Kv (m^3/h) = Es la cantidad de metros cúbicos por hora que pasará a través de la válvula generando una perdida de carga de 1 bar.
Kv (m^3/h) = Flow rate of water in cubic meter per hour that will generate a pressure drop of 1 bar across the valve.

D	Inch	11/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
Kv	m^3/h	11,5	25,5	42,5	68	248	550,5	729	1045	1907	2720

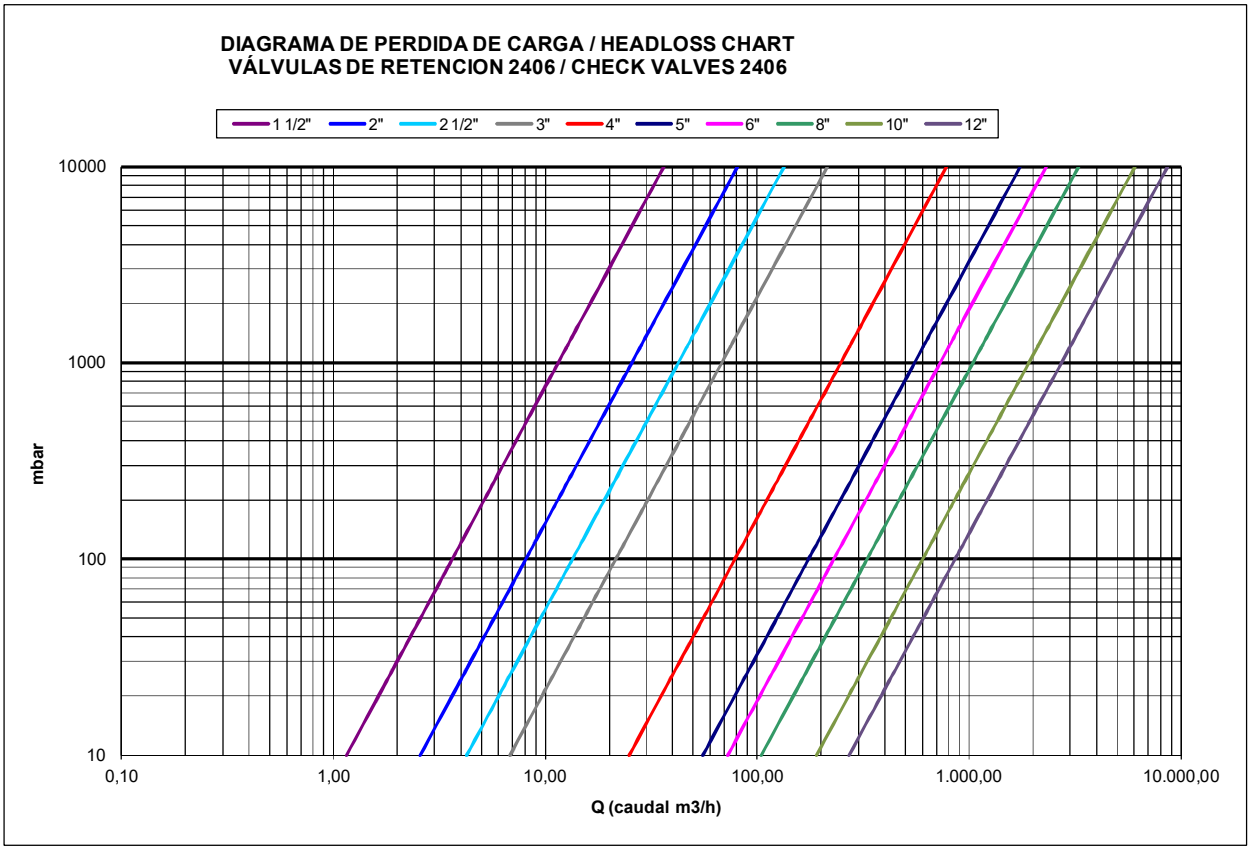

PRESIÓN DE APERTURA / ***OPENING PRESSURE*** **(mbar)**

Flujo / *Flow*	DN40 ~ DN150	DN200 ~ DN300
→	≈ 0	≈ 0
↑	6	9